

- Fully insulated heated cabinets to hold and maintain prepared pre-plated meals at desired serving temperature.
- Choice of cabinets for nested covered plates or for plate carriers.

These hi-tensile all aluminum hot cabinets are furnished with fiberglass insulation, dutch doors and lift-out racks. Extra large angle slides are adjustable on 1-1/2" centers. Cabinets roll easily on 5" deluxe all swivel casters. The bottom mounted heating unit and the air-tunnel at the back are easily removable without the use of any tools and provide the necessary forced air circulation with thermostatically controlled temperature. Desired moisture can be maintained by adjusting openings of the perforated cover of the water reservoir.


HE-2000 Heating Unit: 2000W Heating coil, 2075W total, 17.3 amps at 120 VAC, 60 Hz single phase, furnished with 20 *amps, 8 ft. long cord with 3 prong Nema 5-20P grounding plug. 10 hour timer (with off-on switch), 75W blower, thermostat and pilot lights are standard. Unit has over 4 quarts capacity water reservoir with adjustable opening cover. Blower and heating coils are thermally protected. Optional 220-240V available. Optional **HE-1600** heating unit with 15 *amps service and 1600W heating coil is also available.

*For Canadian application HE-2000 is furnished with 30 amps cord and plug and HE-1600 is furnished with 20 amps cord & plug. Consult factory.


Thermometer: Through the door type with dial on the outside for easy reading of temperature without opening the door.



Heated banquet cabinet
Model 9412-HIN-DD-BQ-90 with dutch
doors for nested plates & covers

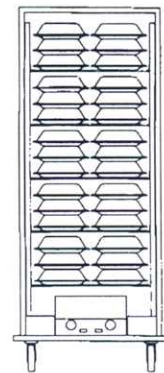

With Nested Banquet Plates

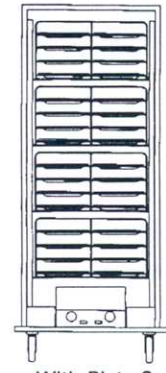

With Plate Carrier



Heated Cabinet Models:

| Type | Model No. (See Notes 1 & 2) | Capacity | Slide Spacing (inches) | Overall Dimensions (inches) | | | Weight (Pounds) |
|-------------------------------------|--------------------------------|----------------|------------------------------|--------------------------------|--------|--------|--------------------|
| | | | | Width | Depth | Height | |
| For Nested Plates with Covers | 9412-HIN-DD-BQ-90 | 90 (Note 1) | 10 1/2** | 31 | 40 5/8 | 72 | 296 |
| For Plate Carriers | 9412-HIN-DD-BPC-96 | 96 (Note 2) | 13 1/2** | 31 | 40 5/8 | 72 | 285 |

**Adjustable on 1 1/2" spacing.

Note 1: Model 9412-HIN-DD-BQ-90 is furnished with 5 sets of large angle slides and 5 wire screens (23"x33"). Capacity is based on covered plates up to 11" in diameter with a nesting height up to 3" (including plate & cover), allowing 18 covered plates to be placed in each section, 3 deep (total capacity = 90) Plates and covers are not furnished.

Note 2: Model 9412-HIN-DD-BPC-96 is furnished with 4 sets of large angle slides. Capacity is based on 8" to 10 1/2" dia. plates (without cover), with 8 plates/carrier and with 3 carriers (approx. 21 1/2"W x 10 3/4"D x 12"H) on each set of slides, allowing 24 plates/section (total capacity = 96). Plates or plate carriers are not furnished. For non standard plate carriers, optional universal angel slides are available.

Options:

- A. Four corner bumpers.
- B. Wrap around bumper.
- C. Wheel brakes (pair).
- D. 6" Polyurethane casters.
- E. 6" Balloon casters.
- F. Lockable latch.
- G. Toor tag holder.
- H. 220/240V Unit.
- I. HE-1600 in lieu of HE-2000 for 15 amps service (U.S.A.)
- J. Canadian application.
- K. Extra set of slides
- L. Extra wire screen (23"x33")
- M. Universal angel slides for non standard plate carriers.

Better food service equipment — standard models and custom designs.

C-11