




Moisture control hot humidified cabinets, insulated, aluminum & stainless steel

- Separate controls for humidity & heating
- Infinite combinations of heating & moisture
- Can also be used as “proofing only” or as “hot proof” combination cabinets
- Flip of a switch converts the unit from dry heating to humidified heating
- Heavy duty construction, fully insulated.
- Removable heating/humidity module
- Furnished with 20 amps cord & NEMA 5-20P plug for 110-120 volt single phase 60 hz service.

Aluminum Hot Humidified Insulated Cabinets

Type	Model No.	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Channel Slide	*9298-HP-IN-DD-1834	18 x 26	1½	34	27	36½	72½	265
	9298-HP-IN-1826	18 x 26	1½	26	27	36½	60½	238
	9298-HP-IN-1816	18 x 26	1½	16	27	36½	42	208
Angle Slide	*9288-HP-IN-DD-1817	18 x 26	3	17	27	36½	72½	268
	9288-HP-IN-1813	18 x 26	3	13	27	36½	60½	241
	9288-HP-IN-1808	18 x 26	3	8	27	36½	42	211
Universal Angle (note 2)	*9238-HP-IN-DD-UA-12	Note 1	4½	12	29½	36½	72½	295
	9238-HP-IN-UA-9	Note 1	4½	9	29½	36½	60½	265
	9238-HP-IN-UA-5	Note 1	4½	5	29½	36½	42	230

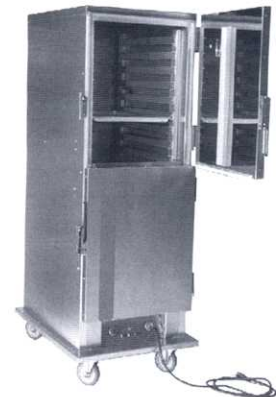

9298-HP-IN-DD-1834

Stainless Steel Hot Humidified Insulated Cabinets

Type	Model No.	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					W	D	H	
Channel Slide	*2298-HP-IN-DD-1834	18 x 26	1½	34	27	36½	72½	378
	2298-HP-IN-1826	18 x 26	1½	26	27	36½	60½	360
	2298-HP-IN-1816	18 x 26	1½	16	27	36½	42	300
Angle Slide	*2288-HP-IN-DD-1817	18 x 26	3	17	27	36½	72½	385
	2288-HP-IN-1813	18 x 26	3	13	27	36½	60½	366
	2288-HP-IN-1808	18 x 26	3	8	27	36½	42	306
Universal Angle (note 2)	*2238-HP-IN-DD-UA-12	Note 1	4½	12	29½	36½	72½	402
	2238-HP-IN-UA-9	Note 1	4½	9	29½	36½	60½	378
	2238-HP-IN-UA-5	Note 1	4½	5	29½	36½	42	310


*Furnished with dutch doors as standard on this model.

NOTE 1: Tray capacity is shown for 18”x 26” bun pans. Capacity for 12”x 20” steam pans/gastronorm (GN1/1) pans (2½” or 4” high) or 14”x 18” trays is twice the number.

NOTE 2: Universal angle slides are adjustable on 1½” (38mm) centers. Each universal slide set can carry one (1) 18”x 26” bun pan or 20”x 20” baking pan or 530mm x 650mm gastronorm (GN2/1) pan or 20”x 20” glass rack or two (2) 12”x 20” steam pans or 325mm x 530mm gastronorm (GN1/1) pan or 14”x 18” trays or 10”x 20” roasting pans or 13¼”x 20¾” school lunch baskets.

General Specifications:

- Side, back, top and door are double wall construction 0.063” aluminum or 22 ga. inner and 20 ga. outer S/S, insulated with 1 ½” fiberglass insulation.
- Deck is made of 0.190”/0.125” thick reinforced aluminum or 14 ga. S/S. Uprites are 2”x1”x1/8” aluminum channels. Universal slides are 0.105” aluminum step angle adjustable on 1 ½” centers. Channel or angle slides are 0.075” thick aluminum. 5”x1 ¼” N.S.F. listed casters are standard. Optional s/s slides and uprites are also available. Consult factory.

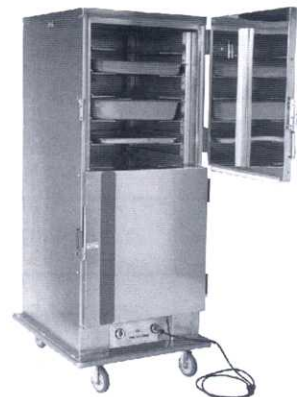

9238-HP-IN-DD-UA-12

OPTIONS:

- A. Wheel brakes
- B. Corner Bumpers
- C. Full perimeter bumpers
- D. Polyurethane casters
- E. Digital thermometer
- F. 6” Balloon casters
- G. Lockable door latch
- H. Pull handles
- I. Lexan® Glass door
- K. 220-240V Application
- L. S/S Slides & uprites

Better food service equipment — standard models and custom designs.

C-12A