


- Fully insulated with separate sections for hot and cold trays.
- Top mounted heating unit with 15 amp cord & Nema 5-15 plug.
- 20 Ga. S/S exterior (18 GA optional).
- Heavy duty welded s/s construction.
- 6" x 2" poly casters, push handle & wrap around bumper are standard.

These hot cabinets are furnished with fiberglass insulation and have separate hot section & ambient section for trays. Cabinets roll easily on 6" casters. The top mounted heating unit is easily removable (non-removable optional) & provides the necessary gentle & forced air circulation with thermostatically controlled temperature.

Outer body, door & top are made of 20 GA. (18 GA. optional) polished stainless steel for strength & durability. Push handle, perimeter bumper, tamper resistant fasteners, 14 GA. s/s deck and heavy duty reinforced correctional hinges & latches are standard.

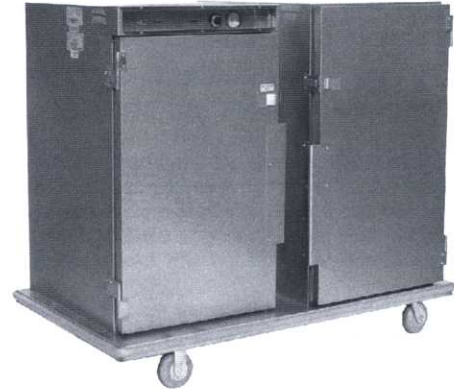

**2287-2-HIN-810-36**  
(with optional correctional package)

HET-1600 Heating Unit:

1600 W Heating coil, 1,750W total, 14.60 amps at 120 VAC 60 HZ single phase furnished with 15 amps, 8ft. long cord with 3 prong Nema 5-15 P grounding plug, off-on switch, two 75W blowers, thermostat and pilot lights. Unit has over 4 quarts capacity water reservoir. Blower and heating coils are thermally protected. Optional 220-240-V available. Optional HET-2000 heating unit with 2000W heating coil and 20 amps cord and 5-20P plug for \*20 amps service is also available. Consult factory.

THERMOMETER: Above the door type with dial on the outside for easy reading of temperature without opening the door.

\*For Canadian application HET-2000 and HET-1600 are furnished with 30 amps/20amps cord and plug respectively.

Model Number	Section	Tray Size (Inches)	Spacing (Inches)	Capacity	O.A. Dimensions (Inches)			Weight (Pounds)
					D	W	H	
2287-2-HIN-810-36	Hot	8½ x 10 x 1¼	5	36	36½	66	55	695
	Ambient	10½ x 17 x 1¼	5	36				
2287-2-HIN-911-52	Hot	9 x 11 x 2	3	52	31½	66	62½	596
	Ambient	9 x 11 x 2	3	52				



**NOTE:** Sample trays are required with order. Cabinets for other sizes are available. Check door clearance to ensure cabinet will go thru'.

ADDITIONAL CORRECTIONAL PACKAGE (OPTIONAL)

1. Non-removable heating unit (in lieu of removable)
2. Heavy duty side mounted security lockable latch
3. 18 ga. s/s exterior
4. 6" balloon casters (in lieu of std 6")
5. Extra set of hinges (3 sets in lieu of 2 sets) for each door

ADDITIONAL OPTIONS:

- A. Towing Hitch
- B. S/S Frame insert for chilled trays.
- C. Dolly for S/S insert for ambient trays