

- Moisture control hot humidified cabinets for pizzas.
- Available in aluminum & stainless steel construction.
- Choice of insulated or non-insulated models.
 - Separate controls for humidity & heating
 - Infinite combinations of heating & moisture
 - Flip of a switch converts the unit from dry heating to humidified heating
- Heavy duty construction
- Removable heating/humidity module
- Furnished with 20 amps cord & NEMA 5-20P plug for 110-120 volt single phase 60 hz service

These moisture controlled hot humidified cabinets are specially designed to carry two 16" pizza boxes or 16" round pizza per pair of slides. Non-insulated models use fixed racks and slides. Insulated models use removable rack. Humidity and heating can be controlled precisely by an "infinite" switch and by a thermostat.

Aluminum Hot Humidified Non-Insulated Cabinets

Model Number	Slide Spacing (Inches)	Capacity 16" Box/Round Pizzas	O.A. Dimensions (Inches)			Weight (Pounds)
			W	D	H	
9284-HP-1634	3	34	22	37 1/8	69 3/8	138
9284-HP-1618	3	18	22	37 1/8	45 3/8	108
9284-HP-1614	3	14	22	37 1/8	39 3/8	98
9284-HP-1610 (for under counter)	3	10	22	37 1/8	33 3/8	88



9284-HP-1610


Aluminum Hot Humidified Insulated Cabinets

Model Number	Slide Spacing (Inches)	Capacity 16" Box/Round Pizzas	O.A. Dimensions (Inches)			Weight (Pounds)
			W	D	H	
*9288-HP-IN-DD-1634	3	34	27	40 1/8	72 1/2	295
9288-HP-IN-1626	3	26	27	40 1/8	60 1/2	265
9288-HP-IN-1616	3	16	27	40 1/8	42	240

Stainless Steel Hot Humidified Insulated Cabinets

Model Number	Slide Spacing (Inches)	Capacity 16" Box/Round Pizzas	O.A. Dimensions (Inches)			Weight (Pounds)
			W	D	H	
*2288-HP-IN-DD-1634	3	34	27	40 1/8	72 1/2	420
2288-HP-IN-1626	3	26	27	40 1/8	60 1/2	390
2288-HP-IN-1616	3	16	27	40 1/8	42	330

*Furnished with dutch doors as standard on this model.

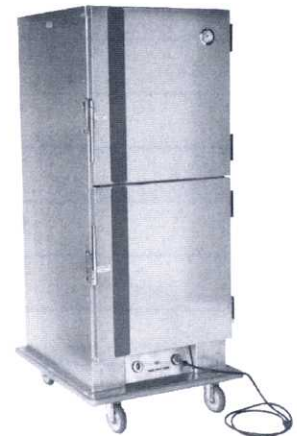

9288-HP-IN-DD-1634

General Specifications:

- Non-insulated aluminum models use 0.080" thick doors & back and 0.063" sides and double wall tops.
- For insulated models, side, back top and door are double wall construction 0.063" aluminum or 22 ga. inner and 20 ga. outer s/s, insulated with 1 1/2" fiberglass insulation.
- Deck is made of 0.190" x 0.125" thick reinforced aluminum or 14 ga. s/s. Uprights are 2"x1"x1/8" aluminum channels. Angle slides are 0.075" thick (min.) aluminum. 5"x1 1/4" N.S.F. listed casters are standard. Optional s/s slides and uprites are also available.
- Heating humidity module uses a 75W blower, 1600W heating coil for heat & 400W water pan heater for humidity.

Options:

- A. Wheel brakes
- B. Corner bumpers
- C. Full perimeter bumpers
- D. Pull Handles
- E. Lexan® Glass door
- F. 220V-240V Application
- G. S/S Slides & uprites

Better food service equipment — standard models and custom designs.