

SAMMONS
EQUIPMENT
 MANUFACTURING CORPORATION
 Shammi Industries

Hot universal angle slide cabinets, insulated & non-insulated

390-A Meyer Circle, Corona, California 92879-1078


Phone (951) 340-3419

Fax (951) 340-2716

- Ideal for schools, institutions, hotels and hospitals.
- Easily accommodates various size pans and trays like 18"x26" buns pans, 12"x20" steam pans, gastronorm (GN 2/1 & GN 1/1) pans, 14"x18", 10"x20" and 20"x22" pans and 13^{3/8}"x20^{3/4}" school lunch baskets.
- Choice of insulated or non-insulated units.

These hi-tensile all*aluminum cabinets provide complete flexibility of mixing and matching different pans. Hot prepared food can be maintained at the proper holding temperature with an easily removable bottom mounted heating unit and the louvered air-tunnel at the back. An electrically operated blower circulates hot air throughout the interior of the cabinet at thermostatically controlled temperature. A water reservoir with an adjustable opening cover provides the necessary moisture. Cabinet rolls easily on 5" deluxe all swivel casters.

* Or stainless steel

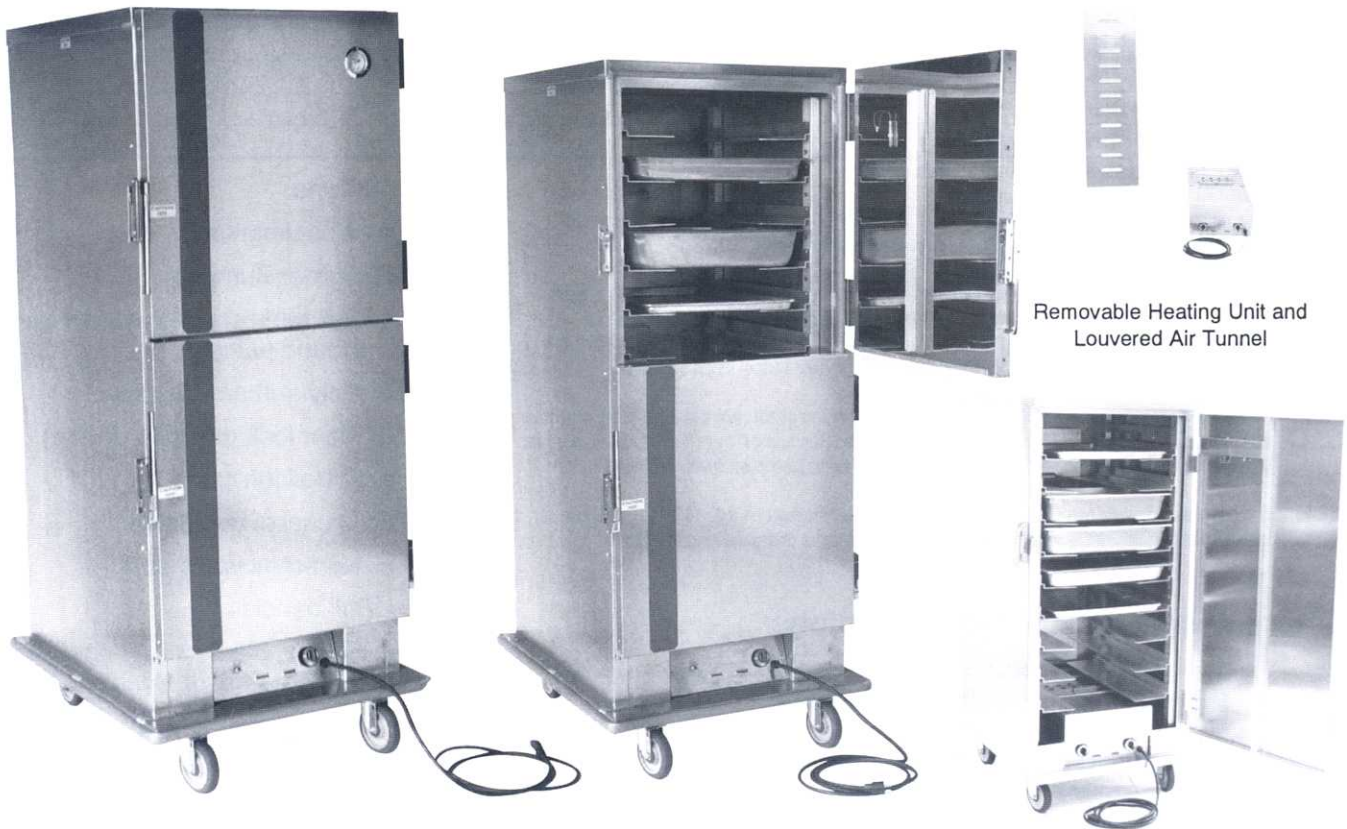

Insulated Model 9232-HIN-DD-UA-12 with Dutch Doors

Non Insulated Model
9230-H-UA-9



LISTED
C



Better food service equipment — standard models and custom designs.

C-7

HE-2000 Heating Unit:

2000W heating coil, 2075W total, 17.3 amps at 120 VAC, 60 Hz single phase, furnished with *20 amps cord, 8 ft. long with 3 prong Nema 5-20P grounding plug. An off-on switch, a 75W blower, full range thermostat and power and heating pilot lights are standard. Unit has over 4 quarts capacity water reservoir with adjustable opening cover. Blower and heating coils are thermally protected. The unit is easily removable without the help of any tools. Optional 220-240V available.

Note: Optional **HE-1600** heating unit in lieu of **HE-2000**, with *15 amps service and 1600W heating coil is available for insulated cabinets at no extra charge. Consult factory.

*For Canadian application, **HE-2000** is furnished with 30 amps cord and plug and **HE-1600** is furnished with 20 amps cord and plug. Consult factory.

Thermometer: Through the door type with dial on the outside for easy reading of temperature without opening the door.

Aluminum Heated Cabinets with Universal Angle Slides (also see notes 3 & 4)

Type	Model Number (Also see note 3)	Tray Capacity (Note 1 & 2)	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)
				W	D	H	
Non-Insulated	9230-H-UA-9	9	4½	26	31	59½	160
	9230-H-UA-10	10	4½	26	31	65½	170
	9230-H-UA-11	11	4½	26	31	70	185
Insulated	9232-HIN-UA-9	9	4½	29½	36¼	60½	265
	*9232-HIN-DD-UA-12	12	4½	29½	36¼	72½	295

Stainless Steel Heated Cabinets with Universal Angle Slides (also see notes 3 & 4)

Type	Model Number (Also see note 3)	Tray Capacity (Note 1 & 2)	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)
				W	D	H	
Non-Insulated	2230-H-UA-9	9	4½	26	31	59½	252
	2230-H-UA-11	11	4½	26	31	70	280
Insulated	2232-HIN-UA-9	9	4½	29½	36¼	60½	378
	2232-HIN-UA-12	12	4½	29½	36¼	72½	402
	*2232-HIN-DD-UA-12	12	4½	29½	36¼	72½	410

*Furnished with dutch doors as standard on this model.

NOTE 1: Tray capacity is shown for 18"x 26" bun pans. Capacity for 12"x 20" steam pans/gastronom (GN1/1) pans (2½" or 4" high) or 14"x 18" trays is twice the number.

NOTE 2: Slides are adjustable on 1½" (38mm) centers. Each universal slide set can carry one (1) Each 18"x 26" bun pan or 20"x 20" baking pan or 530mm x 650mm gastronorm (GN2/1) pan or 20"x 20" glass rack or two (2) each 12"x20" steam pans or 325mm x 530mm gastronorm (GN1/1) pan or 14"x 18" trays or 10"x 20" roasting pans or 13¾"x 20¾" school lunch baskets.

NOTE 3: These cabinets are also available as proofing cabinets in lieu of hot cabinets at no extra charge or as hot/proof combination cabinets at an additional price. Replace -H" by "-P" in model number for proofing cabinets or replace "-H" by "-HP" for hot/proof combination cabinets. Consult Factory.

NOTE 4: Hot insulated cabinets can also be furnished with 1600w heating unit (HE-1600) for 15 amps service instead of standard 2000w heating unit (HE-2000) at no extra charge. Consult factory.

Options:

- A. Wheel brakes
- B. Corner Bumpers
- C. Full perimeter non-marking wrap around bumper.
- D. Polyurethane casters.
- E. Floor lock (car stop device)
- F. 6" Balloon casters
- G. Lockable door latch
- H. Non-removable door
- I. Pull handles
- J. Removable rack for non-insulated models. (std. or insulated cabinets)
- K. Dutch doors (std. On 72½"H insulated cabinets
- L. 220-240V Application
- M. Canadian application
- N. S/S inner door and magnetic gasket
- O. All S/S construction (consult factory)
- P. 10 Hour timer
- Q. Digital thermometer
- R. S/S uprights and slides.
- S. Correctional package.

Other general/ common specifications:

- **Non-insulated models:** sides, back, top and door are made of 0.080" aluminum or 18 ga. S/S with doors reinforced with 1" square tube.
- **Insulated models:** Sides, back, top and door are double wall construction 0.063" aluminum or 22 ga. inner and 20 ga. outer S/S, insulated with 1½" fiberglass insulation.
- **Common:** Deck is made of 0.190"/ 0.125" thick reinforced aluminum or 14 ga. S/S. Uprights are 2"x 1"x 1/8" aluminum channels fixed for non-insulated and removable for insulated models. Slides are 0.105" aluminum step angle universal type, adjustable on 1½" centers. 5"x 1¼" N.S.F listed casters are standard.