
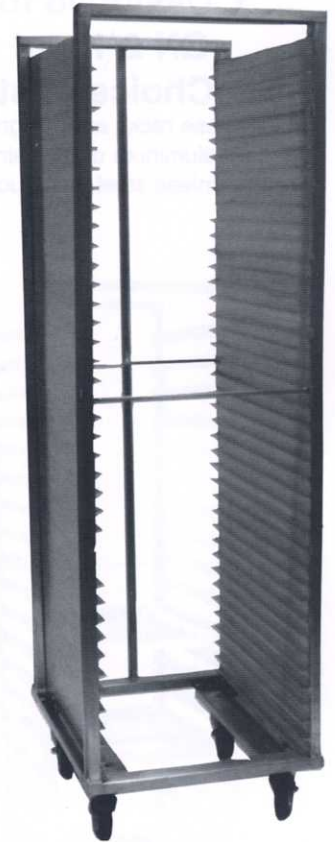


- An indispensable rack for restaurants, hotel kitchens, cafeterias and bakeries and for other food service establishments.
- Designed to handle 18" x 26" bun pans.
- Available in end loading, side loading or double end loading models.
- N.S.F. listed.

This multi-space open rack allows trays to ride on their outer rim and provides years of excellent service. Features include:

- **Sides:** 0.075" thick specially extruded panels with 0.100" thick horizontal tray slides on 1½" centers. Panels have interlocking inverted "V" seams which are further strengthened at the joints.
- **Uprights:** 2" x 1" x 0.125" special extruded aluminum channels.
- **Top & Bottom:** Horizontal members are 2-3/8" x 1" x 0.125" special extruded aluminum channels.
- **Bolsters:** 0.125" formed aluminum for extra rigidity to provide a strong base.
- **Casters:** 5" x 1 ¼", deluxe N.S.F. approved all swivel, non-marking.

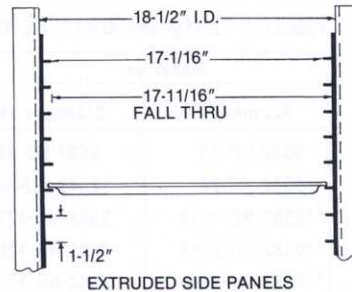

End Loading Rack
 Model S-4354-39
 (with optional pan stop)



** Model No.	Loading	*18" x 26" Pans Capacity	Overall Dimensions (Inches)			Shipping Weight (lbs.)
			A Width	B Depth	C Height	
S-4354-39	End Loading	39	20½	26½	69 ⁷ / ₁₆	66
S-4354-31	End Loading	31	20½	26½	57 ⁷ / ₁₆	57
S-4354-19	End Loading	19	20½	26½	39 ⁷ / ₁₆	43
S-4354-D78	Double End Loading	78	40¼	26½	69 ⁷ / ₁₆	116
S-4354-W39	Side Loading	39	29	18½	69 ⁷ / ₁₆	52
S-4354-W31	Side Loading	31	29	18½	57 ⁷ / ₁₆	47
S-4354-W19	Side Loading	19	29	18½	39 ⁷ / ₁₆	36

*End Loading rack Model S-4354-35 (O.A. height 64 3/16") for 35 pan capacity is also available. Consult factory.

**Optional extra heavy models with welded side panels are also available for correctional & heavy institutional use. Add "-EHD" after model number.

Options:

1. Corner bumpers (set of 4)
2. Vertical pan stop
3. Wheel brakes
4. Wrap around bumper
5. Polyurethane casters
6. Solid base
7. Floor lock

Better food service equipment — standard models and custom designs.

- An extremely versatile rack for restaurants, hotel kitchens, cafeterias, bakeries and hospitals.
- Available in end loading and side loading models.
- N.S.F. listed.

These racks use hi-tensile aluminum with uprights welded at top & bottom to provide extra strength.

CONSTRUCTION FEATURES INCLUDE:


- **Sides:** 0.063" thick hi-tensile aluminum with corrugations spaced on 1½" centers. Bun pans can be pulled out past the halfway point without tipping over.
- **Uprights:** 2"x1"x1/8" special extruded channels.
- **Top & Bottom:** Horizontal members made from 2-3/8"x1"x1/8" special extruded channels.
- **Bolsters:** 0.125" formed aluminum welded to bottom channels to provide a strong base.
- **Casters:** 5"x1 ¼" deluxe, N.S.F. approved. All swivel.

END LOADING RACKS (Except as noted)

Model No.	Pan Capacity	Pan Size (Inches)	Overall Dimension (Inches)			Shipping Wt. (pounds)
			A	B	C	
			Width	Depth	Height	
9120-1839	39	18x26	20½	26½	69 ⁷ / ₁₆	62
9120-1831	31	18x26	20½	26½	57 ⁷ / ₁₆	46
9120-1822	22	18x26	20½	26½	42 ⁷ / ₁₆	32



End Loading Rack
Model 9120-1839

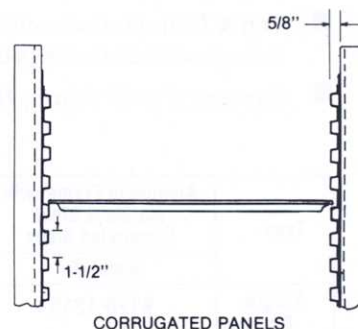

WIDE OPENING RACK (For Side Loading)

Model No.	Pan Capacity	Pan SIZE (Inches)	Overall Dimension (Inches)			Shipping Wt. (pounds)
			A	B	C	
			Width	Depth	Height	
9120-W1839	39	18x26	28½	18½	69 ⁷ / ₁₆	50
9120-W1831	31	18x26	28½	18½	57 ⁷ / ₁₆	48
9120-W1822	22	18x26	28½	18½	42 ⁷ / ₁₆	33

Options:

1. Corner bumpers (set of 4)
2. Vertical pan stop.
3. Wheel brakes
4. Wrap around bumper
5. Polyurethane casters
6. S/S corrugated sides
7. All S/S construction



Better food service equipment — standard models and custom designs.