



Moisture controlled hot cabinets for pizzas, insulated & non insulated

- Choice of aluminum or s/s construction
- Separate controls for humidity & heating
- Flip of a switch converts the unit from dry heating to humidified heating
- Designed for 16" round/16" pizza boxes
- Removable heating/humidity module
- Furnished with 20 amps cord & NEMA 5-20P plug for 110-120 volt single phase 60 hz service

CATALOG PAGE C-23

Aluminum Hot Humidified Non-Insulated Cabinets


Model Number	Slide Spacing (Inches)	Capacity 16" Box/Round Pizzas	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
			W	D	H		
9284-HP-1634	3	34	22	37 1/8	69 3/8	138	\$3,816
9284-HP-1618	3	18	22	37 1/8	45 3/8	108	3,585
9284-HP-1614	3	14	22	37 1/8	39 3/8	98	3,450
9284-HP-1610 (for under counter)	3	10	22	37 1/8	33 3/8	88	3,174



9284-HP-1610

Aluminum Hot Humidified Insulated Cabinets

Model Number	Slide Spacing (Inches)	Capacity 16" Box/Round Pizzas	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
			W	D	H		
*9288-HP-IN-DD-1634	3	34	27	42 1/8	72 1/2	295	\$6,805
9288-HP-IN-1626	3	26	27	42 1/8	60 1/2	265	6,036
9288-HP-IN-1616	3	16	27	42 1/8	42	240	5,703

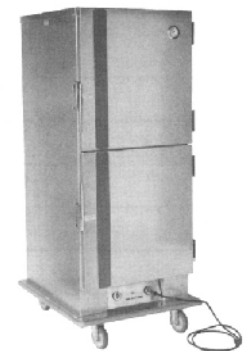

9288-HP-IN-DD-1634

Stainless Steel Hot Humidified Insulated Cabinets

Model Number	Slide Spacing (Inches)	Capacity 16" Box/Round Pizzas	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
			W	D	H		
*2288-HP-IN-DD-1634	3	34	27	42 1/8	72 1/2	420	\$8,505
2288-HP-IN-1626	3	26	27	42 1/8	60 1/2	390	7,644
2288-HP-IN-1616	3	16	27	42 1/8	42	330	7,285

*Furnished with dutch doors as standard on this model.
 For other options, see table CC-1

Nacho/Chip Warmer Stainless Steel Insulated heated cabinets

- S/S insulated cabinet
- Bottom mounted forced air heating
- Offered in single end loaded or double side loaded style
- Uses 6" deep 12" x 20" steam pans (not provided)
- To be filled with chips/nachos
- 3" swivel casters, 2 with brakes

CATALOG PAGE C-37

(For 12"x20"x6" deep steam pans)

Furnished with HE-1600 heating unit with 15 amps cord & NEMA 5-15P plug. 3" casters are standard.
 Power Requirements: Total 1675 watts on 110-120 volts. 60 hz, Single Phase, A.C.

Type	Size of Cabinet	Model Number	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
					W	D	H		
Single end Loaded	Undercounter	2292-HIN-1220-6-2	2	6 5/8	21 7/8	29 1/2	32	168	\$ 4,180
	Half size	2292-HIN-1220-6-3	3	6 5/8	21 7/8	29 1/2	37	175	4,260
Double side loaded	Half size	2292-HIN-1220-6-6	6	6 5/8	29 1/2	36 1/8	37	252	4,886
	Half size	2292-HIN-1220-6-8	8	6 5/8	29 1/2	36 1/8	44	260	5,492



2292-HIN-1220-6-3

For options, see table CC-1



**TABLE CC-1
OPTIONS FOR PROOFER & HOT CABINETS**

	LIST PRICE FOR	
	ALUMINUM MODELS	STAINLESS STEEL MODEL
1. Corner bumpers (set of 4)	\$149	\$164
2. Vertical leg bumpers (set of 4)	175	193
3. Wheel brakes (pair) for 5" or 6" casters	61	61
4. Wrap around bumper (single section cabinet)	269	305
5. Wrap around bumper (double section cabinet)	337	402
6. Floor lock (5")	188	249
7. Floor lock (6")	215	280
8. Floor lock (8")	292	355
9. Extra pair of universal angle slides	101	167
10. <u>CASTERS UPGRADE (IN LIEU OF 5" STANDARD, SET OF 4)</u>		
A. 5" Polyurethane	119	119
B. 5" Balloon (decorative)	149	149
C. 6" Polyurethane (1,200# capacity)	184	184
D. 6" Heavy duty polyurethane (2,000# capacity)	280	280
E. 5" Hi-Temp	221	221
F. 6" Balloon	326	326
G. 8" Polyurethane	315	315
H. Stationary legs	280	280
11. <u>CASTERS UPGRADE (IN LIEU OF 6" STANDARD, SET OF 4)</u>		
A. 6" Balloon	236	236
B. 8" Balloon	390	390
C. 8" Polyurethane	249	249
12. Swing door catch (for each door)	106	125
13. Door tag holder (for each door)	61	96
14. Lockable latch (for each door)	127	149
15. Top mounted latch (for each door)	244	299
16. Push handle (each)	167	215
17. Push handle (each) with 2 donut bumpers	215	272
18. Solid dutch doors (non-insulated) in lieu of single solid door	270	352
19. Solid dutch doors (insulated) in lieu of single solid door	342	559
20. Single LEXAN [®] door in lieu of single solid door	384	471
21. Dutch LEXAN [®] doors in lieu of single solid door	706	844
22. Dutch LEXAN [®] doors in lieu of single LEXAN [®] door	279	355
23. *Single pass thru' door in the rear	546	697
24. *Dutch pass thru' doors in the rear	683	1,222
25. 220v/240v application (in lieu of 120v)	348	348
26. Canadian application (in lieu of U.S.)	229	229
27. 17 hour timer (in lieu of 10 hour)	145	145
28. HE-2000 (2,000w heating, 20 amps service unit) in lieu of HE-1600 (1,600w heating, 15 amps service unit)	184	184
29. Bail handles/pair/ side	145	201
30. Drain hole/section	132	132
31. Export crating	566	566

*FOR HOT INSULATED CABINETS WITH TOP MOUNTED HEATING UNITS ONLY.

NOTE: Most aluminum hot, proof & hot/proof cabinets are also available in s/s construction. Add 65% to list prices of aluminum models unless listed otherwise based on a minimum quantity of 5 units & an up charge of 20% to 80% may apply for quantities under 5. Consult factory.