



# Deluxe, universal angle type heater/proofer combination cabinets, insulated & non-insulated

Furnished with HPR-2000 heating/proofering unit with 20 amps cord & NEMA 5-20P plug. 5" casters are standard.  
Power Requirements: Total 2075 watts on 110-120 volts.  
60 hz, Single Phase, A.C.

CATALOG PAGE C-4

## Deluxe Aluminum Hot/Proof Cabinets (Universal Angle Slide Type)

Type	Model Number	Pan Size (Inches)	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (see note 3)
					W	D	H		
<b>Non-Insulated</b>	<b>9231-HP-UA-17</b>	Note 2	17 (Note 1)	3	29½	33¾	71	245	\$3,508
<b>Insulated</b>	<b>9234-HP-IN-UA-17</b>	Note 2	17 (Note 1)	3	31½	36¾	72½	305	P.O.R.



**9231-HP-UA-17**

## Deluxe Stainless Steel Hot/Proof Cabinets (Universal Angle Slide Type)

Type	Model Number	Pan Size (Inches)	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (See note 3)
					W	D	H		
<b>Non-Insulated</b>	<b>2231-HP-UA-17</b>	Note 2	17 (Note 1)	3	29½	33¾	71	292	\$5,983
<b>Insulated</b>	<b>2234-HP-IN-UA-17</b>	Note 2	17 (Note 1)	3	31½	36¾	72½	378	P.O.R.

**NOTE 1:** Capacity shown is based on 3" spacing. Each unit is furnished with 17 sets of slides which are adjustable on 1½" centers.

**NOTE 2:** Each pair of slides can accommodate one (1) 18"x 26" bun pan or one (1) GN2/1 gastronorm pan or two (2) 14"x 18" trays or one (1) 23"x 23" screen or two (2) 12"x 20" steam pans or two (2) gastronorm GN1/1 pans.

**NOTE 3:** LEXAN® glass door is standard on 9231, 9234, 2231 & 2234 model series cabinets. Solid door in lieu of LEXAN® door is available at no extra charge for correctional or heavy institutional use. These cabinets are also available in half size (8 pan capacity) as well as in under counter sizes. Consult factory. For options, see Table CC-1

# Hot/proof combination universal angle slide cabinets, insulated & non-insulated

Furnished with HPR-2000 heating/proofering unit with 20 amps cord & NEMA 5-20P plug. 5" casters are standard.  
Power Requirements: Total 2075 watts on 110-120 volts.  
60 hz, Single Phase, A.C.

CATALOG PAGES C-7A & C-8A

## Aluminum Hot/Proof Combination Cabinets with Universal Angle Slides

Type	Model Number (Also see note 3)	Tray Capacity (Note 1 & 2)	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
				W	D	H		
<b>Non-Insulated</b>	<b>9233-HP-UA-9</b>	9	4½	26	31	59½	160	\$4,027
	<b>9233-HP-UA-10</b>	10	4½	26	31	65½	170	4,275
	<b>9233-HP-UA-11</b>	11	4½	26	31	70	185	4,368
<b>Insulated</b>	<b>9235-HP-IN-UA-9</b>	9	4½	29½	36¾	60½	265	4,476
	<b>*9235-HP-IN-DD-UA-12</b>	12	4½	29½	36¾	72½	295	5,116



**9235-HP-IN-DD-UA-12**

## Stainless Steel Hot/Proof Combination Cabinets with Universal Angle Slides

Type	Model Number (Also see note 3)	Tray Capacity (Note 1 & 2)	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
				W	D	H		
<b>Non-Insulated</b>	<b>2233-HP-UA-9</b>	9	4½	26	31	59½	252	P.O.R.
	<b>2233-HP-UA-11</b>	11	4½	26	31	70	280	\$6,147
<b>Insulated</b>	<b>2235-HP-IN-UA-9</b>	9	4½	29½	36¾	60½	378	6,980
	<b>2235-HP-IN-UA-12</b>	12	4½	29½	36¾	72½	402	7,552
	<b>*2235-HP-IN-DD-UA-12</b>	12	4½	29½	36¾	72½	410	7,794

\*Furnished with dutch doors as standard on this model.

**NOTE 1:** Tray capacity is shown for 18"x 26" bun pans. Capacity for 12"x 20" steam pans/gastronorm (GN1/1) pans (2½" or 4" high) or 14"x 18" trays is twice the number.

**NOTE 2:** Slides are adjustable on 1½" centers. Each universal slide set can carry one (1) 18"x 26" bun pan or 20"x 20" baking pan or gastronorm (GN2/1) pan or 20"x 20" glass rack or two (2) 12"x 20" steam pans or gastronorm (GN1/1) pan or 14"x 18" trays.

**NOTE 3:** Solid door is standard on these 9233, 9235, 2233 & 2235 model series cabinets. Optional LEXAN® glass door is available. For options, see Table CC-1.



**TABLE CC-1  
OPTIONS FOR PROOFER & HOT CABINETS**

	LIST PRICE FOR	
	ALUMINUM MODELS	STAINLESS STEEL MODEL
1. Corner bumpers (set of 4)	\$149	\$164
2. Vertical leg bumpers (set of 4)	175	193
3. Wheel brakes (pair) for 5" or 6" casters	61	61
4. Wrap around bumper (single section cabinet)	269	305
5. Wrap around bumper (double section cabinet)	337	402
6. Floor lock (5")	188	249
7. Floor lock (6")	215	280
8. Floor lock (8")	292	355
9. Extra pair of universal angle slides	101	167
10. <u>CASTERS UPGRADE (IN LIEU OF 5" STANDARD, SET OF 4)</u>		
A. 5" Polyurethane	119	119
B. 5" Balloon (decorative)	149	149
C. 6" Polyurethane (1,200# capacity)	184	184
D. 6" Heavy duty polyurethane (2,000# capacity)	280	280
E. 5" Hi-Temp	221	221
F. 6" Balloon	326	326
G. 8" Polyurethane	315	315
H. Stationary legs	280	280
11. <u>CASTERS UPGRADE (IN LIEU OF 6" STANDARD, SET OF 4)</u>		
A. 6" Balloon	236	236
B. 8" Balloon	390	390
C. 8" Polyurethane	249	249
12. Swing door catch (for each door)	106	125
13. Door tag holder (for each door)	61	96
14. Lockable latch (for each door)	127	149
15. Top mounted latch (for each door)	244	299
16. Push handle (each)	167	215
17. Push handle (each) with 2 donut bumpers	215	272
18. Solid dutch doors (non-insulated) in lieu of single solid door	270	352
19. Solid dutch doors (insulated) in lieu of single solid door	342	559
20. Single LEXAN <sup>®</sup> door in lieu of single solid door	384	471
21. Dutch LEXAN <sup>®</sup> doors in lieu of single solid door	706	844
22. Dutch LEXAN <sup>®</sup> doors in lieu of single LEXAN <sup>®</sup> door	279	355
23. *Single pass thru' door in the rear	546	697
24. *Dutch pass thru' doors in the rear	683	1,222
25. 220v/240v application (in lieu of 120v)	348	348
26. Canadian application (in lieu of U.S.)	229	229
27. 17 hour timer (in lieu of 10 hour)	145	145
28. HE-2000 (2,000w heating, 20 amps service unit) in lieu of HE-1600 (1,600w heating, 15 amps service unit)	184	184
29. Bail handles/pair/ side	145	201
30. Drain hole/section	132	132
31. Export crating	566	566

\*FOR HOT INSULATED CABINETS WITH TOP MOUNTED HEATING UNITS ONLY.

**NOTE:** Most aluminum hot, proof & hot/proof cabinets are also available in s/s construction. Add 65% to list prices of aluminum models unless listed otherwise based on a minimum quantity of 5 units & an up charge of 20% to 80% may apply for quantities under 5. Consult factory.




## Deluxe proofing cabinets non-insulated

Furnished with PR-1400 proofing unit with 15 amps cord & NEMA 5-15P plug. 5" casters are standard.  
Power Requirements: Total 1475 watts on 110-120 volts. 60 hz, Single Phase, A.C.

CATALOG PAGE C-1

### Deluxe Proofing Cabinets (Aluminum)

Type	Size of Cabinet	Model Number	Pan Capacity (18"x26")	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (See note)
					W	D	H		
Extruded Sides	Full Size	9251-DEP-1834	34	1½	22	30⅞	69⅞	170	\$3,186
	¾ Size	9251-DEP-1826	26	1½	22	30⅞	57⅞	162	3,374
	Half Size	9251-DEP-1818	18	1½	22	30⅞	45⅞	150	3,353
Corrugated Sides	Full Size	9271-DEP-1834	34	1½	22	30⅞	69⅞	168	3,547
*Angle Ledge	Full Size	9281-DEP-1817	17	*3	22	30⅞	69⅞	174	3,445
	¾ Size	9281-DEP-1813	13	*3	22	30⅞	57⅞	168	3,491

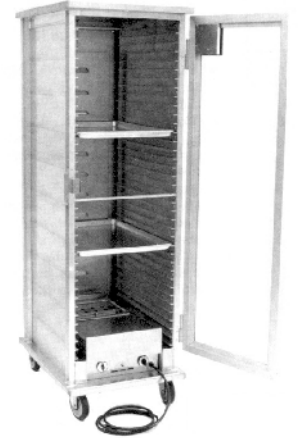

9251-DEP-1834

### Deluxe Proofing Cabinets (Stainless Steel)

Type	Size of Cabinet	Model Number	Pan Capacity (18"x26")	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (See note)
					W	D	H		
Corrugated Sides	Full Size	2271-DEP-1834	34	1½	22	30⅞	69⅞	255	\$5,367
Channel Slides	Full Size	2251-DEP-1834	34	1½	22	30⅞	69⅞	265	5,535
*Angle Slides	Full Size	2281-DEP-1817	17	*3	22	30⅞	69⅞	240	5,446

\*Angle ledge cabinets are also available with 5 1/16" slide spacing. Other sizes & spacings are also available. Consult factory. For options, see Table CC-1

**NOTE: LEXAN® door is standard on these proofing cabinets. Solid door in lieu of LEXAN® door is available at no extra charge. Consult factory.**


## Deluxe universal angle type proofing cabinets, insulated & non-insulated

Furnished with PR-1400 proofing unit with 15 amps cord & NEMA 5-15P plug. 5" casters are standard.  
Power Requirements: Total 1475 watts on 110-120 volts. 60 hz, Single Phase, A.C.

CATALOG PAGE C-3

### Deluxe Aluminum Proofing Cabinets (Universal Angle Slide Type)

Type	Model Number	Pan Size (Inches)	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (See note 3)
					W	D	H		
Non-Insulated	9231-DEP-UA-16	Note 2	16 (Note 1)	3	29½	33⅞	71	245	\$3,383
Insulated	9234-DEP-IN-UA-16	Note 2	16 (Note 1)	3	31½	36⅞	72½	305	P.O.R.

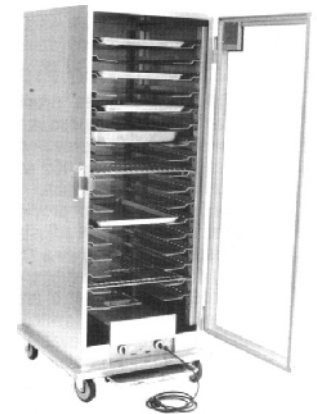

9231-DEP-UA-16

### Deluxe Stainless Steel Proofing Cabinets (Universal Angle Slide Type)

Type	Model Number	Pan Size (Inches)	Pan Capacity	Pan Spacing (Inches)	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (See note 3)
					W	D	H		
Non-Insulated	2231-DEP-UA-16	Note 2	16 (Note 1)	3	29½	33⅞	71	292	\$5,830
Insulated	2234-DEP-IN-UA-16	Note 2	16 (Note 1)	3	31½	36⅞	72½	378	P.O.R.

**NOTE 1:** Capacity shown is based on 3" spacing. Each unit is furnished with 16 sets of slides which are adjustable on 1½" centers.

**NOTE 2:** Each pair of slides can accommodate on 18"x 26" bun pan or one GN2/1 gastronorm pan or two 14"x 18" trays or one 23"x 23" screen or two 12"x 20" steam pans or two gastronorm GN1/1 pans.

**NOTE 3:** LEXAN® glass door is standard on 9231, 9234, 2231 & 2234 model series cabinets. Solid door in lieu of LEXAN® door is available at no extra charge for correctional or heavy institutional use. These cabinets are also available in half size (8 pan capacity) as well as in under counter sizes. Consult factory. For options, see Table CC-1