




## Moisture control hot humidified cabinets, insulated, aluminum & stainless steel

- Separate controls for humidity & heating
- Infinite combinations of heating & moisture
- Can be used as “proofing only” or as “hot proof” combination cabinets
- Flip of a switch converts the unit from dry heating to humidified heating
- Heavy duty construction, fully insulated, & furnished with removable rack & 5” non-marking casters
- Removable heating/humidity module
- Furnished with 20 amps cord & NEMA 5-20P plug for 110-120 volt single phase 60 hz service.

CATALOG PAGES C-12A

### Aluminum Hot Humidified Insulated Cabinets

Type	Model No.	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
					W	D	H		
Channel Slide	*9298-HP-IN-DD-1834	18 x 26	1½	34	27	36¾	72½	265	\$5,187
	9298-HP-IN-1826	18 x 26	1½	26	27	36¾	60½	238	P.O.R.
	9298-HP-IN-1816	18 x 26	1½	16	27	36¾	42	208	P.O.R.
Angle Slide	*9288-HP-IN-DD-1817	18 x 26	3	17	27	36¾	72½	268	5,250
	9288-HP-IN-1813	18 x 26	3	13	27	36¾	60½	241	P.O.R.
	9288-HP-IN-1808	18 x 26	3	8	27	36¾	42	211	P.O.R.
Universal Angle (note 2)	*9238-HP-IN-DD-UA-12	Note 1	4½	12	29½	36¾	72½	295	5,398
	9238-HP-IN-UA-9	Note 1	4½	9	29½	36¾	60½	265	5,108
	9238-HP-IN-UA-5	Note 1	4½	5	29½	36¾	42	230	P.O.R.

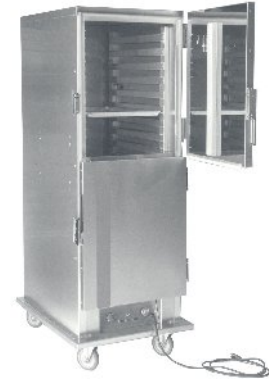

9298-HP-IN-DD-1834

### Stainless Steel Hot Humidified Insulated Cabinets

Type	Model No.	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
					W	D	H		
Channel Slide	*2298-HP-IN-DD-1834	18 x 26	1½	34	27	36¾	72½	378	\$7,503
	2298-HP-IN-1826	18 x 26	1½	26	27	36¾	60½	360	6,799
	2298-HP-IN-1816	18 x 26	1½	16	27	36¾	42	300	P.O.R.
Angle Slide	*2288-HP-IN-DD-1817	18 x 26	3	17	27	36¾	72½	385	7,629
	2288-HP-IN-1813	18 x 26	3	13	27	36¾	60½	366	6,919
	2288-HP-IN-1808	18 x 26	3	8	27	36¾	42	306	P.O.R.
Universal Angle (note 2)	*2238-HP-IN-DD-UA-12	Note 1	4½	12	29½	36¾	72½	402	7,810
	2238-HP-IN-UA-9	Note 1	4½	9	29½	36¾	60½	378	6,996
	2238-HP-IN-UA-5	Note 1	4½	5	29½	36¾	42	310	P.O.R.



9238-HP-IN-DD-UA-12

\*Furnished with dutch doors as standard on this model.

**NOTE 1:** Tray capacity is shown for 18”x 26” bun pans. Capacity for 12”x 20” steam pans/gastronorm (GN1/1) pans (2½” or 4” high) or 14”x 18” trays is twice the number.

**NOTE 2:** Universal angle slides are adjustable on 1½” (38mm) centers. Each universal slide set can carry one (1) 18”x 26” bun pan or 20”x 20” baking pan or 530mm x 650mm gastronorm (GN2/1) pan or 20”x 20” glass rack or two (2) 12”x 20” steam pans or 325mm x 530mm gastronorm (GN1/1) pan or 14”x 18” trays or 10”x 20” roasting pans or 13¾”x 20¾” school lunch baskets. For options, see Table CC-1

## Nacho/Chip warmer non-insulated heated cabinet

Furnished with two (2) 18”X 26”X 15” lugs, sliding lid & removable HE-1600 heating unit with 15 amps cord & NEMA 5-15P plug.


CATALOG PAGES C-2R

3” casters are standard.

(Allows scooping up of chips/nachos from the top by sliding the lid)

Type	Model Number	O.A. Dimensions W x D x H (Inches)	Weight (Pounds)	List Price
Aluminum	9250-H-ER-2	22 x 30¾ x 48¾	160	\$3,118
Stainless Steel	2250-H-ER-2	22 x 30¾ x 48¾	310	P.O.R.

For options, see Table CC-1.



9250-H-ER-2



**TABLE CC-1  
OPTIONS FOR PROOFER & HOT CABINETS**

	LIST PRICE FOR	
	ALUMINUM MODELS	STAINLESS STEEL MODEL
1. Corner bumpers (set of 4)	\$149	\$164
2. Vertical leg bumpers (set of 4)	175	193
3. Wheel brakes (pair) for 5" or 6" casters	61	61
4. Wrap around bumper (single section cabinet)	269	305
5. Wrap around bumper (double section cabinet)	337	402
6. Floor lock (5")	188	249
7. Floor lock (6")	215	280
8. Floor lock (8")	292	355
9. Extra pair of universal angle slides	101	167
10. <u>CASTERS UPGRADE (IN LIEU OF 5" STANDARD, SET OF 4)</u>		
A. 5" Polyurethane	119	119
B. 5" Balloon (decorative)	149	149
C. 6" Polyurethane (1,200# capacity)	184	184
D. 6" Heavy duty polyurethane (2,000# capacity)	280	280
E. 5" Hi-Temp	221	221
F. 6" Balloon	326	326
G. 8" Polyurethane	315	315
H. Stationary legs	280	280
11. <u>CASTERS UPGRADE (IN LIEU OF 6" STANDARD, SET OF 4)</u>		
A. 6" Balloon	236	236
B. 8" Balloon	390	390
C. 8" Polyurethane	249	249
12. Swing door catch (for each door)	106	125
13. Door tag holder (for each door)	61	96
14. Lockable latch (for each door)	127	149
15. Top mounted latch (for each door)	244	299
16. Push handle (each)	167	215
17. Push handle (each) with 2 donut bumpers	215	272
18. Solid dutch doors (non-insulated) in lieu of single solid door	270	352
19. Solid dutch doors (insulated) in lieu of single solid door	342	559
20. Single LEXAN <sup>®</sup> door in lieu of single solid door	384	471
21. Dutch LEXAN <sup>®</sup> doors in lieu of single solid door	706	844
22. Dutch LEXAN <sup>®</sup> doors in lieu of single LEXAN <sup>®</sup> door	279	355
23. *Single pass thru' door in the rear	546	697
24. *Dutch pass thru' doors in the rear	683	1,222
25. 220v/240v application (in lieu of 120v)	348	348
26. Canadian application (in lieu of U.S.)	229	229
27. 17 hour timer (in lieu of 10 hour)	145	145
28. HE-2000 (2,000w heating, 20 amps service unit) in lieu of HE-1600 (1,600w heating, 15 amps service unit)	184	184
29. Bail handles/pair/ side	145	201
30. Drain hole/section	132	132
31. Export crating	566	566

\*FOR HOT INSULATED CABINETS WITH TOP MOUNTED HEATING UNITS ONLY.

**NOTE:** Most aluminum hot, proof & hot/proof cabinets are also available in s/s construction. Add 65% to list prices of aluminum models unless listed otherwise based on a minimum quantity of 5 units & an up charge of 20% to 80% may apply for quantities under 5. Consult factory.